
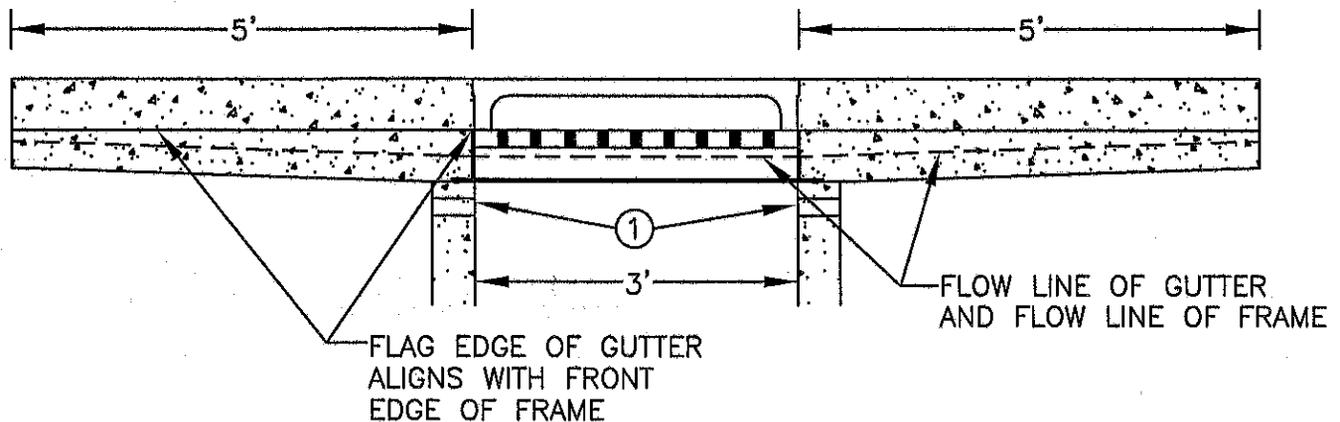


TOP OF FRAME TO
FRONT EDGE OF FRAME

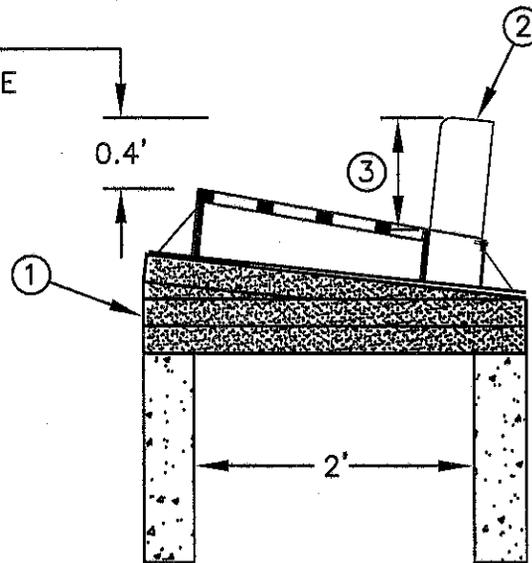

NOTES:

- ① HIGH DENSITY POLYETHYLENE ADJUSTING RINGS SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS STARTING ON A SOLID, CLEANED TOP SECTION OF THE INPLACE CATCH BASIN. THE CATCH BASIN FRAME & RING CASTING SHALL BE SEALED TO THE STRUCTURE WITH A UNI-BAND (RUBBER) SEALING SYSTEM.
- ② REFER TO PLANS AND/OR SPECIAL PROVISIONS FOR FRAME AND GRATE TYPE.
- ③ 0.50' - DESIGN D4 MODIFIED C&G
0.75' - DESIGN B618 OR B624 C&G
4. FOR ADJUSTMENTS IN DESIGN B624 C&G 6" OF CONCRETE SHALL BE PLACED FRONTING THE FRONT EDGE OF THE FRAME.

DATE REVISED

07/22/11

2'x3' CB FRAME ADJUSTMENT

PLATE NO.

1-01