




DESIGN D4
MODIFIED

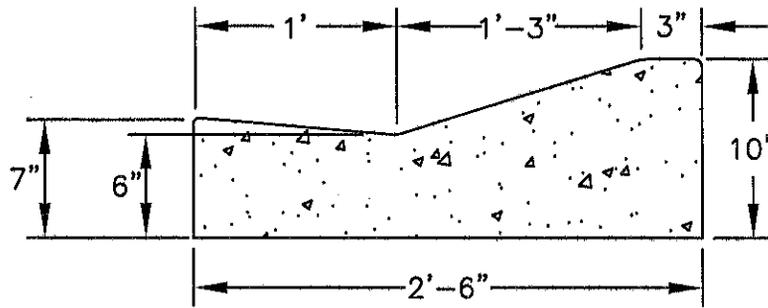

DESIGN D412

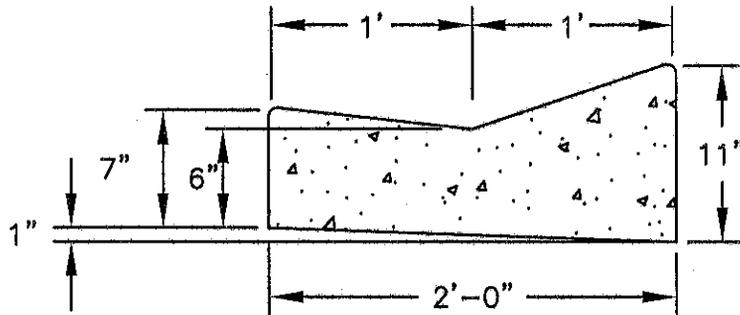

DESIGN B6

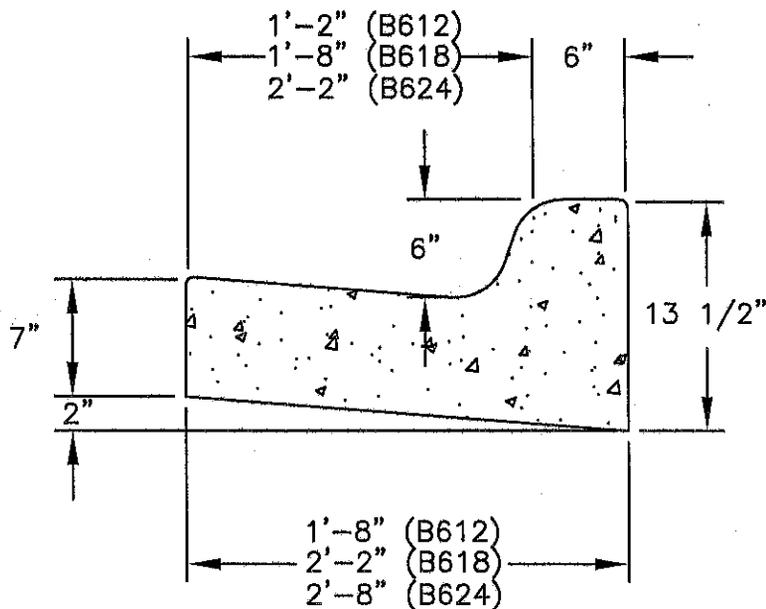

NOTES:

1. CONCRETE MIX: MANUAL PLACEMENT—MnDOT SPEC. 3A32,
SLIP FORM PLACEMENT—MnDOT SPEC. 3A22.
2. PROVIDE 1/2" EXP. JT. AT 300' MAX. SPACING
IN ADDITION TO EXP. JTS. SHOWN ON OTHER DETAIL PLATES.
3. PROVIDE 1/2" EXP. JT. ALONG BACK OF CURB AT LOCATIONS
WHERE CURB ABUTS BUILD WALLS AND RETAINING WALLS.
4. PROVIDE CONTRACTION JOINTS AT 10' MAX. SPACING.
5. CONCRETE TO BE CONSTRUCTED ON A PROPERLY COMPACTED BASE.

DATE REVISED

02/12/14

CONCRETE CURB & GUTTER

PLATE NO.

3-01