




DESIGN D4
MODIFIED

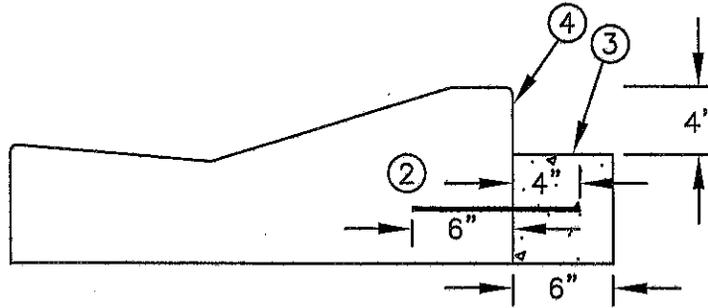

DESIGN D412

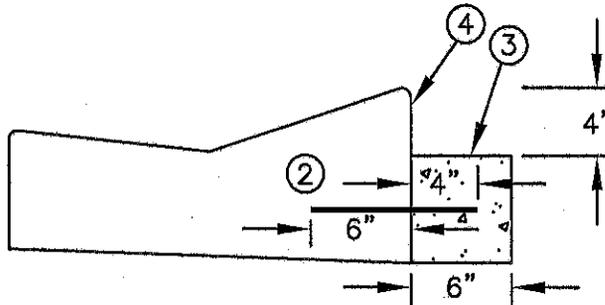

DESIGN B6

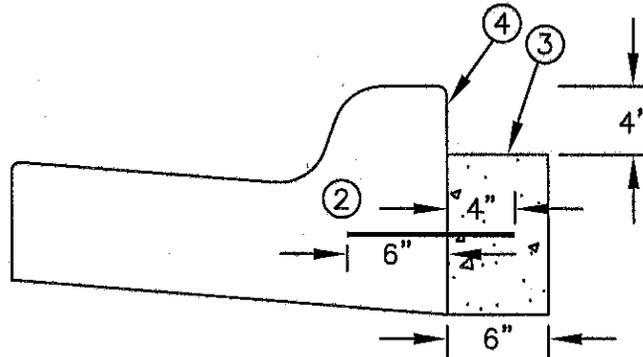

NOTES:

1. CONCRETE SILL TO BE USED WHERE 4" CONCRETE (SIDEWALKS, CARRIAGE WALKS, PEDESTRIAN RAMPS AND MEDIAN INFILL) ABUTS BACK OF CURB.
- ② TIE SILL AT 3' CENTERS WITH 10" #4 REINFORCING BARS (GR, 60). IN PLACE CURB WILL REQUIRE DRILLING FOR REINFORCING BAR PLACEMENT. NO REINFORCING BARS REQUIRED IF SILL IS POURED MONLITHICALLY WITH CURB. (SEE PLATE NO. 3-01 FOR MnDOT SPEC. MIXES)
- ③ PROVIDE BOND BREAK AT TOP OF SILL.
- ④ PROVIDE 1/2" EXP. JT. AT MEDIAN INFILLS. 1/2" EXP. JT. NOT REQUIRED AT PEDESTRIAN RAMP, SIDEWALK AND CARRIAGE WALK ABUTMENTS.
5. AT PEDESTRIAN RAMPS ABUTTING B6 CURB, SILL SHALL BE TRANSITIONED ACCORDINGLY TO CONFORM WITH RAMP TAPERING.
6. CONCRETE TO BE CONSTRUCTED ON A PROPERLY COMPACTED BASE.

DATE REVISED

09/05/13

CONCRETE SILL

PLATE NO.

3-02